

## 2 WHEEL APPLICATOR INSTRUCTIONS


1. Ensure before you start you have the correct nozzle on can to fit the applicator and you have carefully read the instructions on the can. Fig 1.



2. Remove the spring loaded retaining pin and actuator bar from the applicator. Fig 2.



3. Insert can ensuring grooves in nozzle are located in applicator being careful not to apply any pressure to the nozzle. Fig 3.

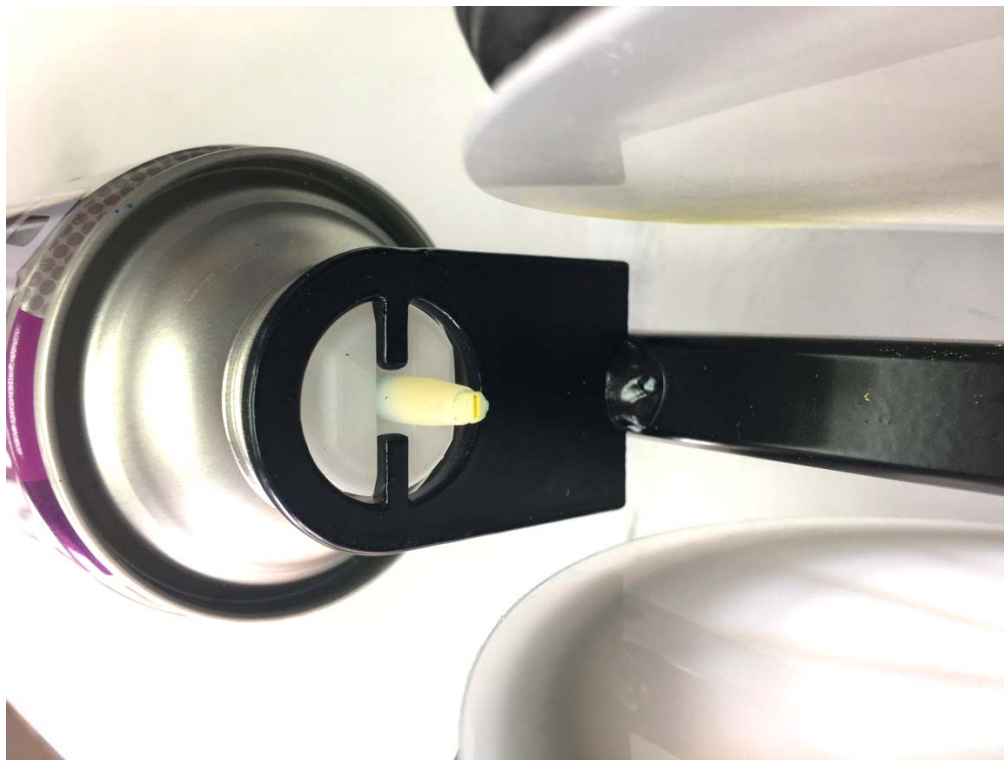

4. Refit the actuator bar to suit can size. For 750ml cans the short end of the bar needs to point towards the end of the can. Refit the retaining pin. Fig 4.



5. The applicator is then ready to use. To apply paint hold handle and press down on button. Please follow instructions on can for nozzle cleaning etc.