



Figure 1 Configuration for roads – longitudinal view, not to scale



Guardian Goalpost with bunting option

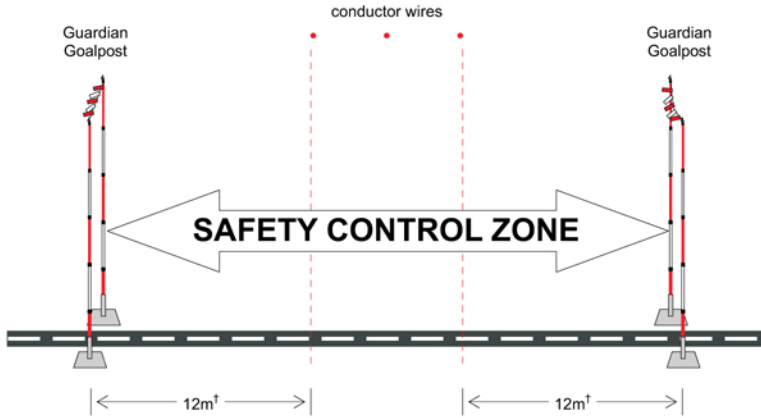

Solid Telescopic Bar option




Cantilever arm option




Guardian Goal Posts with lighting attached for night work

Figure 2 Configuration for roads – transverse view, not to scale

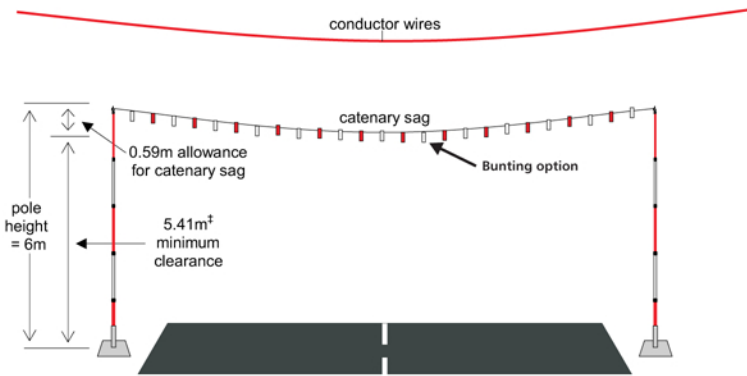

<sup>†</sup>GS6 Avoidance of danger from overhead electric power lines clause 24

<sup>†</sup>Traffic Signs Manual, Chapter 8, Traffic Safety Measures and Signs for Road Works and Temporary Situations Part 1: 2006, clause D3.2.22 states that the minimum headroom at temporary structures should be 5.41m.

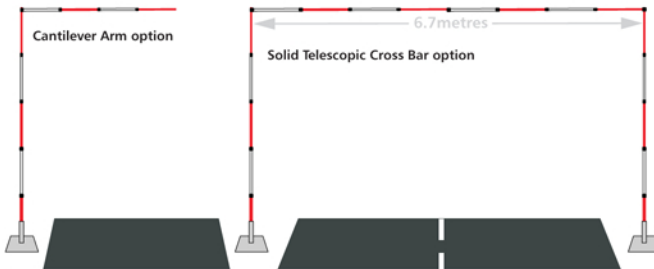

Warning signs easily attached