


AERIALINE® TEMPORARY HORIZONTAL LIFELINE

TECHNICAL SPECIFICATION

HEIGHT SAFETY

FAR0804

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.

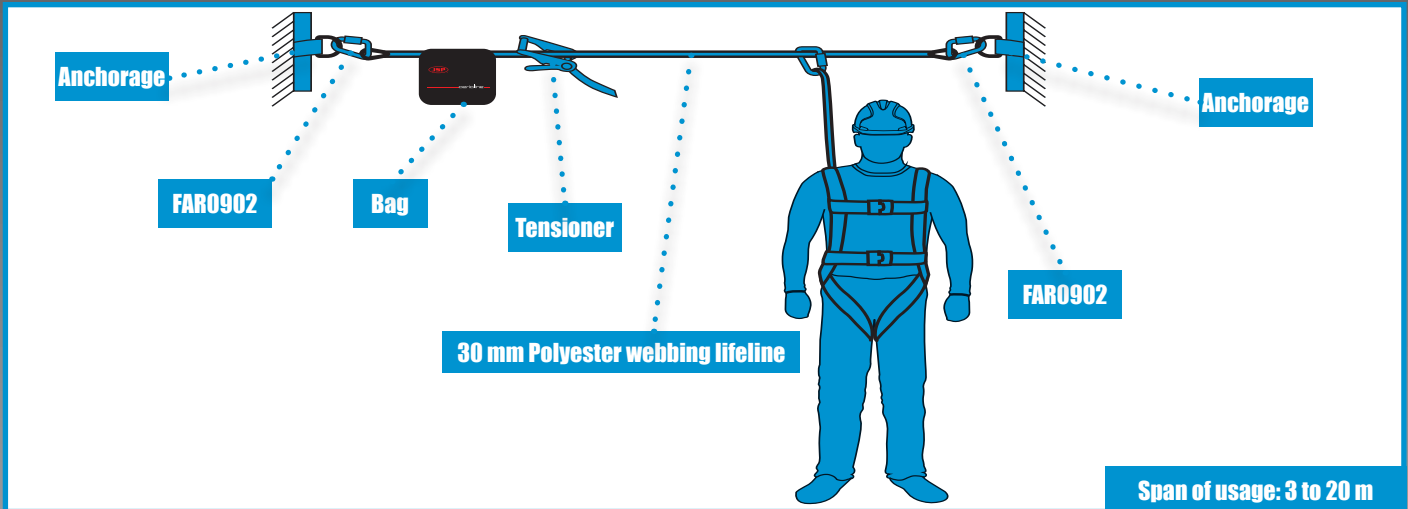

DIMENSIONS

Size: 20 meters
Weight: 3450 g (+- 10 g)

WEBBING

Material: Polyester
Width : 30 mm +- 1 mm
Minimum breaking strength: 25 kN

RACHET TENSIONER

Material: Alloy steel
Capable of tensioning the line by rotary motion
Spring loaded locking & unlocking mechanism

CHARACTERISTICS

Consists of 30 mm polyester webbing lifeline.
Equipped with ratchet tensioner to tighten the line.
Two connectors provided for attachment to anchor points.
Suitable for use by two personnel simultaneously.
2 Cross arm strap for anchorage EN795:2012 type B, length 1m.
2 twist lock connector in alloy steel. Gate opening 22.5 mm. Conforms to EN362:2004 class B

CLEANING & MAINTENANCE

In case of minor soiling, wipe the equipment with cotton cloth or soft brush. Do not use any abrasive material. For intensive cleaning wash in water at a temperature not more than 40°C using a neutral detergent. It should be allowed to dry by itself and be kept away from open fire or any other source of heat. Avoid direct sunlight.

The Personal Protective Equipment must be transported in a package that protects against moisture, mechanical, chemical and thermal attack. Store in a cool dry place. Avoid humid & acidic environment for storage.

The user should carry out a pre-use check of the equipment, to ensure that it is in a serviceable condition and operates correctly before it is used. The pre use check shall involve checking of any wear or abrasion on webbings and sign of corrosion if any on metal parts.

CONFORMITY

EN 795: 2012 & TS 16415: 2013 Type B & C
The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.
Static strength: 10 kN for 3 Minutes
Dynamic strength: 2 meters free fall with mass of 100kg

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JPSAFETY.COM

